


Dimensions

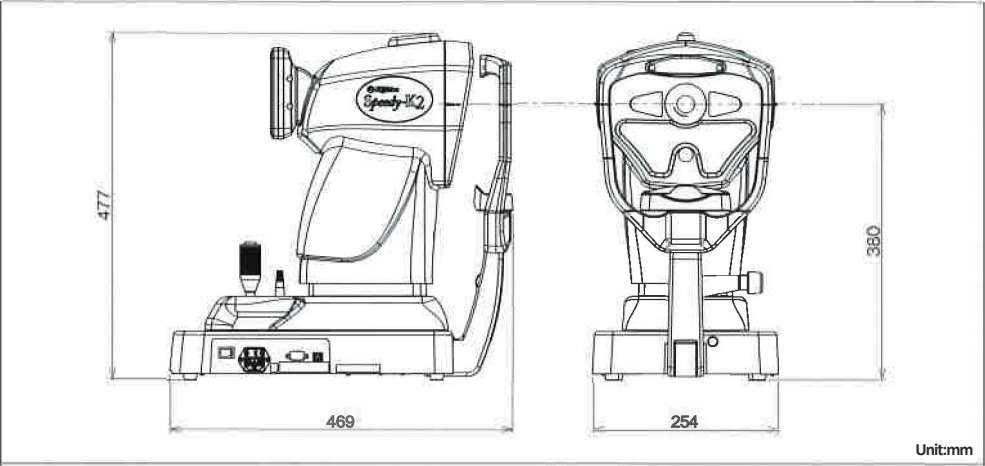

Specifications

Refractometry	
Measurement range	SPH: -20.00D to +23.00D (AUTO/ 0.12D / 0.25D increments) CYL: 0D to ±12.00D (0.12D / 0.25D increments) Axis: Oto 180° (1° increments)
Minimum pupil diameter	02.3 mm
Vertex distance	Oand 12, 13.5, 13.75, 15 or 16 mm
FO measurement	1 to 83 mm
Rxation chart	Fire work & Road; high/mid/low intensity
Pupil size reading range	2.0 to 12.0 mm
Keratometry	
Measurement range	Radius curvature: 5.00 to 11.00 mm Corneal astigmatism: 0.00D to 12.00D Axis: Oto 180°
Measurement area	Center: 03.2 mm (R 8.0 mm) Peripheral: 25° 06.8 mm (R 8.0 mm)
Corneal size measurement range	Oto 16.0 mm
General	
Data storage	50 persons (100 eyes)
Display	5.7-inch color LCD touch panel (tilt Oto 45°)
Interface	RS232C, USB, R
Dimension	254 (N) x 469 (D) x 447 (H) mm
Weight	Approx. 13 kg
Power supply	AC100 - 240V 50/60Hz
Power consumption	40VA

Print sample

-- ID:0000D0002 --									
-- No.00001									
, 14. 01. 22 8:22AM									
Name: VD:12.0 PD:63.5 CHART:M									
-REF-									
[R]	SPH	CYL	AX						
	- 0.62	- 0.62	130						
	- 0.50	- 0.62	134	AO					
	- 0.75	- 0.50	131	AO					
	- 0.75	- 0.50	129	AO					
	- 0.62	- 0.62	129						
* - 0.62 - 0.62 130 10									
(S+C/2 = - 0.87)									
x: 4.4 y: 4.3									
[L]	SPH	CYL	AX						
	- 2.00	- 0.50	23						
	- 2.00	- 0.50	25						
	- 2.00	- 0.50	33						
	- 2.00	- 0.50	32						
	- 1.75	- 0.50	34						
* - 2.00 - 0.50 32 9									
(S+C/2 = - 2.25)									
x: 3.9 y: 3.8									
-KER-									
[R]	R1	R2	AX1	AX2					
	* 8.04	7.81	159	69					
			D	deg					
	R1	8.04	42.00	159					
	R2	7.81	43.25	69					
	AV	7.92	42.62						
	CYL		- 1.25	159					
[L]	R1	R2	AX1	AX2					
	* 8.18	7.93	14	104					
			D	deg					
	R1	8.18	41.25	14					
	R2	7.93	42.50	104					
	AV	8.05	41.87						
	CYL		- 1.25	14					
-KER (PERI) -									
[R]	H	8.02	42.12						
	V	7.83	43.12						
	(25)								
	T	8.18	41.25						
	N	8.12	41.62						
	S	8.11	41.62						
	I	7.96	42.37						
	E(H)	0.475							
	E(V)	0.591							
	E(AV)	0.544							
[L]	H	8.17	41.25						
	V	7.94	42.50						
	(25)								
	T	8.32	40.62						
	N	8.35	40.37						
	S	8.26	40.87						
	I	8.17	41.25						
	E(H)	0.520							
	E(V)	0.676							
	E(AV)	0.610							
-R Cy1-									
[R]	CYL	AX							
	+ 1.00	173							
[L]	CYL	AX							
	+ 0.87	4							
RIGHTON SPEEDY-K2									

Righton

Auto Refract-Keratometer

Speedy-K2



Made in JAPAN



CUS

UL Classified
See complete marking on product

WARNING: To ensure correct usage, read all manuals carefully before using equipment

Specifications and equipment are subject to change without any notice or obligation on the part of the manufacture., © 2014 RIGHT MFG, CO., LTD.
The information in this brochure is correct as of September 2013.



MERCOFRAMES OPTICAL CORP.

© 5555 NW 74 AVE. Miami, FL 33166 /mercoframes
sales@mercoframes.net www.mercoframes.com
305-882-0120 Whatsapp www.mercoframesusa.com


Simple and stable, with the fastest measurement

Righton original retinoscopy measurement principle achieves extremely fast auto REF/KER measurement

Measurement speed is 30% faster than the Speedy-i/K. (REF: 125 ms/7 times, KER: 260 ms/1 time)
Measurement begins immediately after alignment. In addition to KER/REF continuous measurement, auto and continuous peripheral kerato measurement are also conducted. The pupil distance is automatically detected. Each measurement can not only be manually operated but also set to start by a single joystick operation for high-speed measurement.

The resting state of accommodation function EJ:m

Speedy-K2 displays spherical equivalent values as graphs that are continuously measured every 30 seconds. The resting state of accommodation is automatically calculated and printed out.

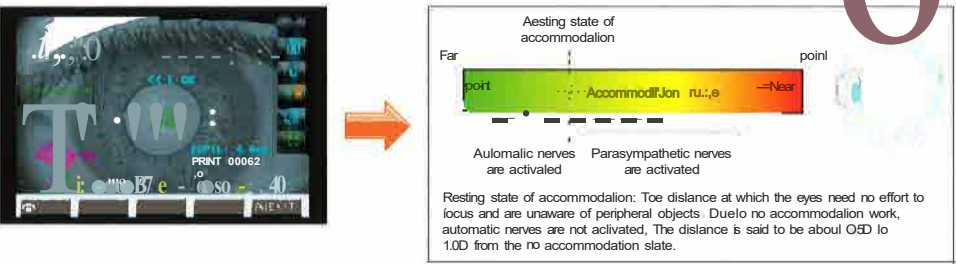

A2 Selective fogging method EJm

In addition to normal fogging, more precise fogging is possible by selecting A2 using the measurement mode key. This kind of fogging is useful for reading the eyes of patients with unstable eyes etc.

Various auxiliary functions for stable measurement

Righton original unique fixation system EJm

The light intensity can be changed with 3 steps. H (high) is added to measure unstable pupils (conventional H is the same as M with K2). The unique fireworks picture chart enables astigmatism patients to focus on any of the meridian lines so that the patient can follow the picture. When the pupil diameter is smaller than 3mm, the light intensity drops automatically.

Pupil size measurement

Pupil size can be measured during a refraction reading to allow for differences in eye pigmentation.

Auto Quick mode and manual switch mode

Automatically starts even faster, a useful feature for restless patients, such as children and patients unaccustomed to treatment. When slower measurement is needed for any reason, manual switch mode is available by setting Auto Start to off, then measurement starts only when the joystick's button is pressed.

Cornea diameter can be also measured (Ø - 16 mm)

Auto calculation of residual astigmatism

During REF/KER measurement, residual astigmatism is automatically calculated and printed out. This is necessary for astigmatic contact lens prescriptions and astigmatic IOL.

Retro Illumination mode

When measurement is unstable, opaque media such as cataracts can be detected using the monitor.



Easy-to-operate 5.7 inch color LCD touch panel EJm

Intuitive operation
Easy input of patient ID



LCD with 45-degree tilt far free measurement posture EJm

The LCD can be tilted (0-45 degrees), allowing the examiner to conduct measurements from a standing or seated position. This allows the examiner to adjust instruments while checking the monitor.

Easy changing of printer paper

To change printer paper, simply insert the paper roll and close the cover.



Low power consumption, lightweight and efficient design

Power consumption: 40VA (approx. 35% less than conventional models)
Weight (main body): 13 kg (approx. 10% lighter than conventional models)
Printout content is re-aligned to save printing paper.

Save measurement data of 50 patients

REF/KER measurement data of up to 50 patients (100 eyes) can be saved.



The best combination far Remate Vision RV11

Wireless transfer of measurement data with RV-11s is possible.

i-Media

With i-Media, data communication with devices in other rooms is possible.